



COMBUSTION BUSINESS UNIT



COMPANY HISTORY



TN Group is Thailand's leading company in the production and import of industry-related products. With 45-year experience since the establishment of the company until present, the company has had a strong intention to offer and deliver the quality products to the end-customers. Currently, TN Group owns three production facilities, which work separately based on the specialization of each production line.

- Venz Electric - Electric Motor, Water pump and Industrial Fan production factory.
- Venz Manufacturing group - Industrial fan and Blower, pollution control system production factory.
- Venz Industrial - production of an electric fan specially used inside a building.

To be the leading service provider in the industrial sector, apart from owing our own production lines, our company also import other industrial-related products, which reach international standard, and being accepted worldwide, to response to the customer demand in the market. We are the exclusive sole distributor of many products such as Electric Motor, Motor Gear, Several Gear Reducers, Industrial power transmission equipment. Industrial pump, plumping system, Burner, Inverter, AC Motor Drive or other Automation systems, Pollution control system. Agricultural equipment, and Industrial related products.

Regarding to the distribution channel, TN Group's Headquarter located on Petchkasem Rd. This location is to serve the customers who live in the south and west area of Bangkok. Apart from the Headquarter, the company also set up Bangna branch to offer the sales and service in the East of Bangkok, whereas Thonburi Branch is to serve inner Bangkok. Additionally, the company opened its provincial branch in Rayong and Suratthani. In the foreseeable future, TN Group plans to open its branches in the important provinces countrywide.



COMBUSTION BUSINESS UNIT

Combustion Business Unit imports and supplies Burner with high performance and energy saving from Italy and Germany providing the model of MonoBlock (Ecoflam, Elco Klockner) and Separated Block (Ecoflam TS) which can be used with Diesel, Heavy Oil, LPG, and NG. Besides, some series are dual system where customers can use either Gas or Oil as their alternatives. For your convenience and cost saving, we provide our team that can assist you for system installation as we alliance such as PTT and Unique gas which can support you to construct gas supply station and license. Moreover, we also have the experts to install specific types of gasoline Burner. Our products are widely used in all types of businesses, Such as incinerator, Oven, Boiler, Melting steel, Industrial Fryer, Painting system, Ceramic etc.


OUR WORLDWIDE NETWORK



Manufacturing is carried out in the factory of Resana (Treviso - Italy) and products are distributed worldwide thanks to a wide and highly qualified network of partners.

In more than 40 years, Ecoflam has been capable to build loyal partnerships and today can count on reliable partners in more than 100 Countries. They distribute Ecoflam products in their Countries of competence, they have good knowledge of the products, and can carry out commissioning and service by keeping constantly in touch with the headquarter.

Thanks to this international network Ecoflam is also able to offer original spare parts in order to guarantee reliability and safe continued operation of the end user installation.

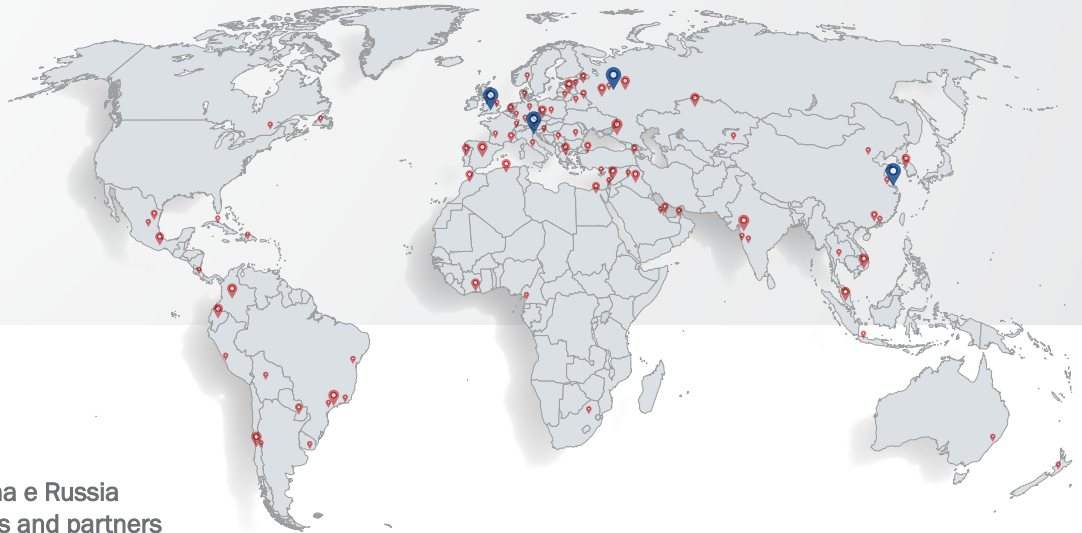

Ecoflam Worldwide

Headquarters in Italy

Subsidiary in UK

Sales Representative Office in Cina e Russia

Strong presence thanks to dealers and partners

Distribution in more than 100 Countries



MULTICALOR

Dual fuel (gas/light oil)
190 - 17000 kW



MULTIFLAM

Dual fuel (gas/heavy oil)
414 - 17000 kW



TS RANGE

All fuels
230 - 34000 kW




**SPECIAL
VERSIONS**

GAS RANGE เื้ออเพลิงแก๊ส


MAX GAS

RANGE OVERVIEW

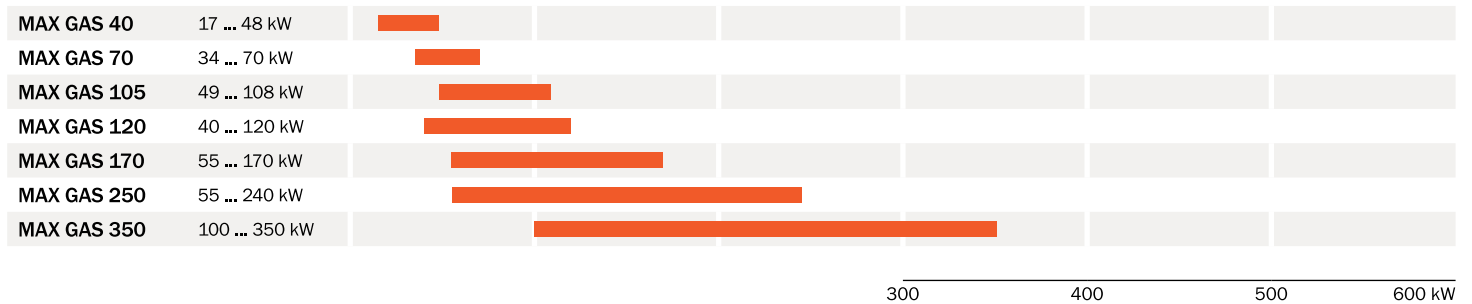


MAIN FEATURES

- Two stage PAB models available with different burner controllers, with or without digital informative display
- High efficiency fan ventilation system (HPV) allowing easy burner-boiler matching even with high combustion chamber pressure
- Combustion head easy to assemble and adjust
The hinge flange allows easy access to the combustion head without losing the original settings (MAX GAS 350 and MAX GAS 500)
- Models from MAX GAS 40 to MAX GAS 120 work with 50-60 Hz electrical frequency

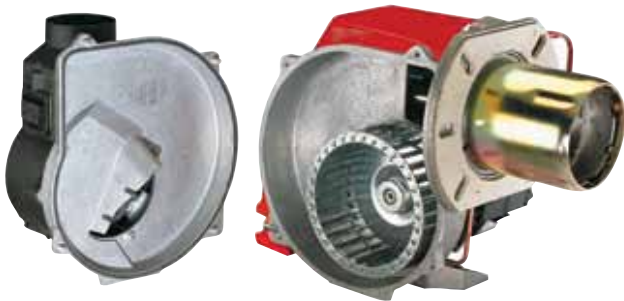

High efficiency fan ventilation system (HPV)

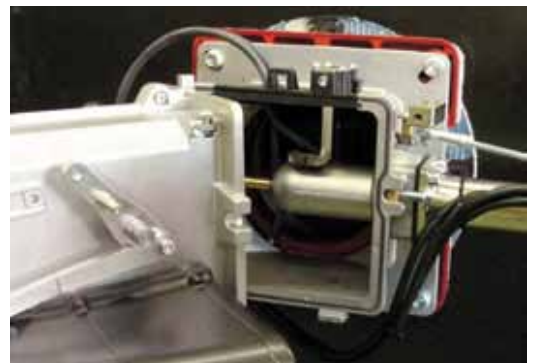

Hinge flange (MAX GAS 350 and MAX GAS 500)



CONFIGURATIONS

MAX GAS range is available in the following versions:

MAX GAS ... P	One stage Low NOx Class 3	All models	On - Off
MAX GAS ... PAB	Two stages Low NOx Class 3	MAX GAS 120...500	Low - High
MAX GAS ... PR	Two stage progressive mechanical Low NOx Class 3	MAX GAS 350-500	Modulate

Other available configurations:

- Versions with continuous ventilation up to MAX GAS 250 P
- LPG versions in one stage, two stages or two stage progressive mechanical operation (all models are Low NOx Class 3)
- Progressive versions are available for MAX GAS 350 and MAX GAS 500 and can be transformed into modulating with an optional kit
- OEM and special versions on request according to feasibility

FUEL

- Natural gas (NG)
- LPG
- Bio gas ไบโอดีเซล

EMISSIONS

Class	NOx mg/kWh
1	170
2	120
3	80

All models are in compliance with EN 676 European Standard

CONFORM TO

All products are in accordance with the following directives:

- 2006/42/EC Machinery Directive
- 2004/108/EC EMC Directive
- 2006/95/EC Low Voltage Directive
- 2009/142/EC Gas Appliances Directive

MAX GAS 250 PAB



MAX GAS 350 P



MAX GAS 500 PR




GAS RANGE เื่อเพลิงก๊ส


BLU

RANGE OVERVIEW

Low NOx Classe 3 (NOx < 80 mg/kWh)

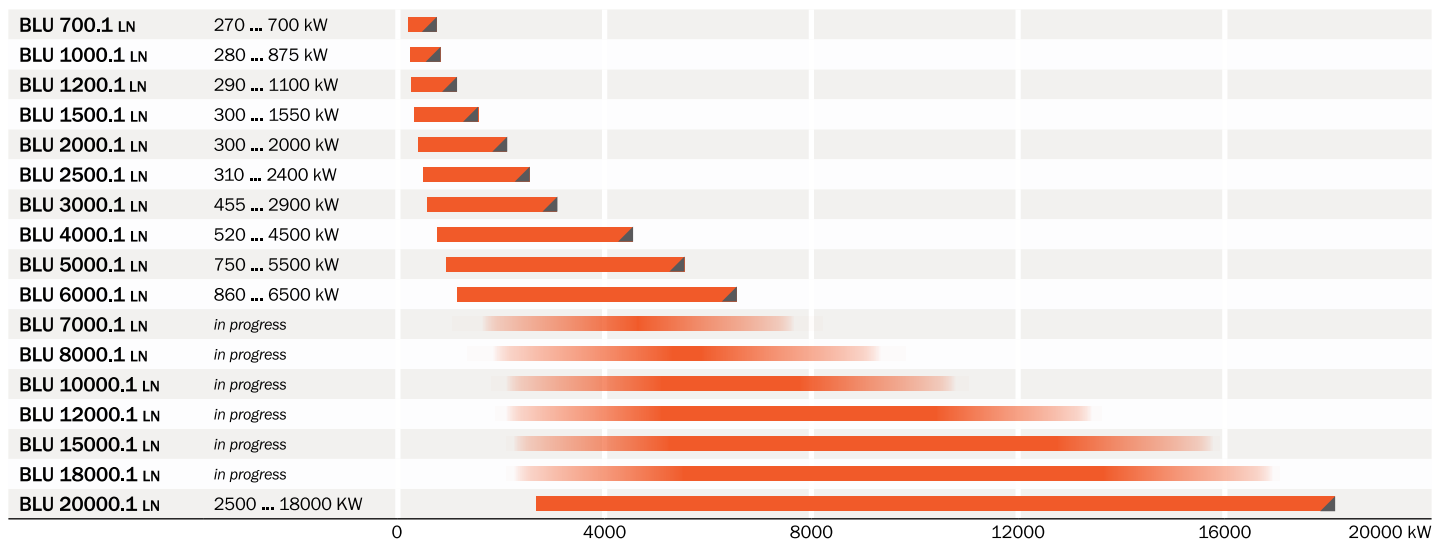

Low NOx Classe 2 (NOx < 120 mg/kWh)

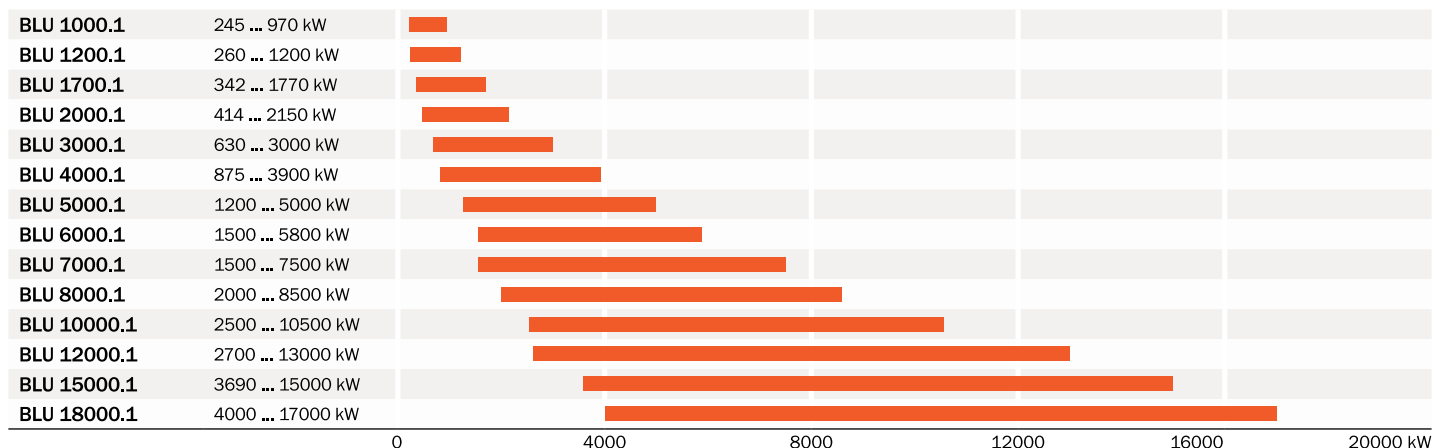

MAIN FEATURES

- Modulating version with PID system controller with digital set point display and real time value
- Version with fully electronic Burner Management System available for all models
- Adjustable combustion head for easy regulation and matching with different combustion chambers
- Configured and special versions on request for selected type of applications and fuel characteristics


BLU 500.1 PAB



BLU 700.1 PAB



BLU 2000.1 PAB

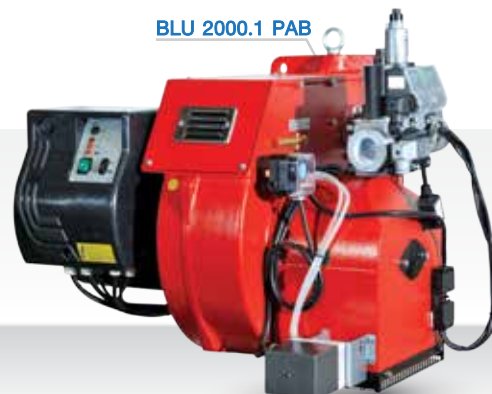

CONFIGURATIONS

BLU range is available in the following versions:

BLU ... PAB	Two stages Two stages Low NOx Class 3	BLU 1000.1 ... 1500.1 BLU 700.1 ... 2000.1	On - Off
BLU ... PR	Two stages progressive mechanical Two stages progressive mechanical Low NOx Class 3	BLU 1000.1 ... 18000.1 BLU 700.1 ... 20000.1	Low - High
BLU ... PRE	Two stages progressive electronic Two stages progressive electronic Low NOx Class 3	BLU 1000.1 ... 18000.1 BLU 700.1 ... 20000.1	Modulate

Other available configurations:

- Swirl system for flame geometry customization
- OEM and special versions on request according to feasibility

FUEL

- Natural gas (NG)
- LPG
- Bio gas ไบโอมีเทน

EMISSIONS

Class	NOx mg/kWh
1	170
2	120
3	80

All models are in compliance
with EN 676 European Standard

CONFORM TO

All products are in accordance with
the following directives:

- 2006/42/EC Machinery Directive
- 2004/108/EC EMC Directive
- 2006/95/EC Low Voltage Directive
- 2009/142/EC Gas Appliances Directive

BLU 6000.1 PR




BLU 15000.1 PR



LIGHT OIL RANGE น้ำมันดีเซล

MAX

RANGE OVERVIEW

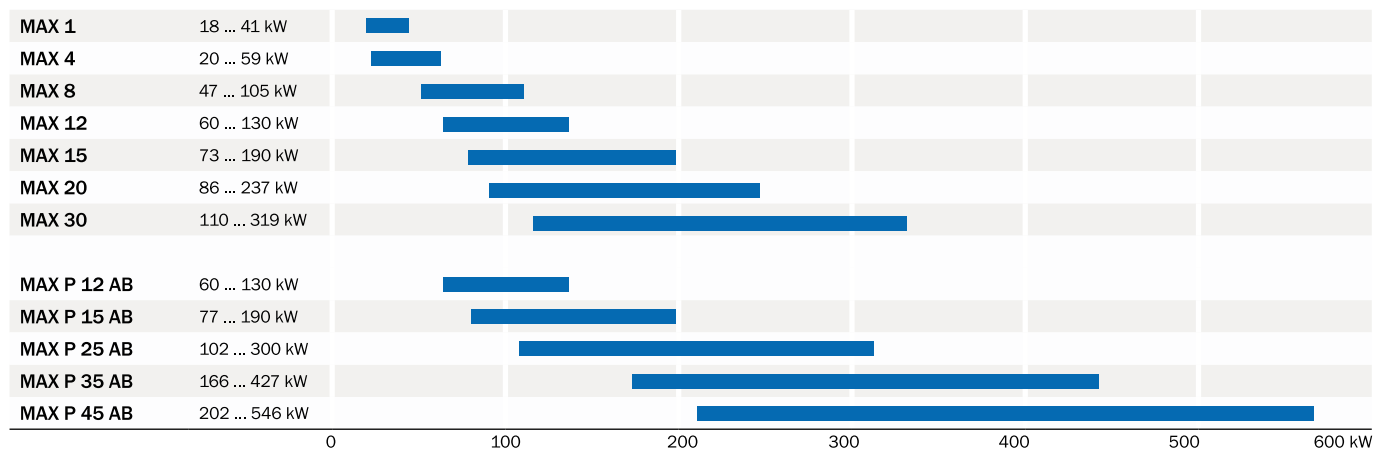

MAIN FEATURES

- New high efficiency fan ventilation system (HPV) allowing easy matching with boilers having high combustion chamber back pressure
- Electrical wiring simple to disassemble for easy maintenance
- Combustion head easy to assemble and adjust
- The hinge flange allows easy access to burner head without losing burner settings (MAX 35 and MAX 45)
- Models from MAX 1 to MAX 12 work with 50-60 Hz electrical frequency



CONFIGURATIONS

MAX range is available in the following versions:

MAX	One stage Low NOx Class 2	All models	On - Off
MAX P ... AB	Two stages Low NOx Class 2	MAX P 35 AB - P 45 AB	Low - High
MAX P ... AB HS	Two stages with hydraulic system Low NOx Class 2	MAX P 12 AB HS ... P 45 AB HS	Modulate

Other available configurations:

- High temperature versions with continuous ventilation are available for all models
- Versions with specific pump for light oil with maximum viscosity 5 °E at 20 °C
- OEM and special versions on request according to feasibility

FUEL

- Light oil (max visc. 1,5 °E at 20 °C) น้ำมันดีเซล
- Bio Diesel (ไบโอดีเซล)


EMISSIONS

Class	NOx mg/kWh
1	250
2	185
3	120

All models are in compliance with EN 267 European Standard


CONFORM TO

- All products are in accordance with the following directives:
- 2006/42/EC Machinery Directive
 - 2004/108/EC EMC Directive
 - 2006/95/EC Low Voltage Directive

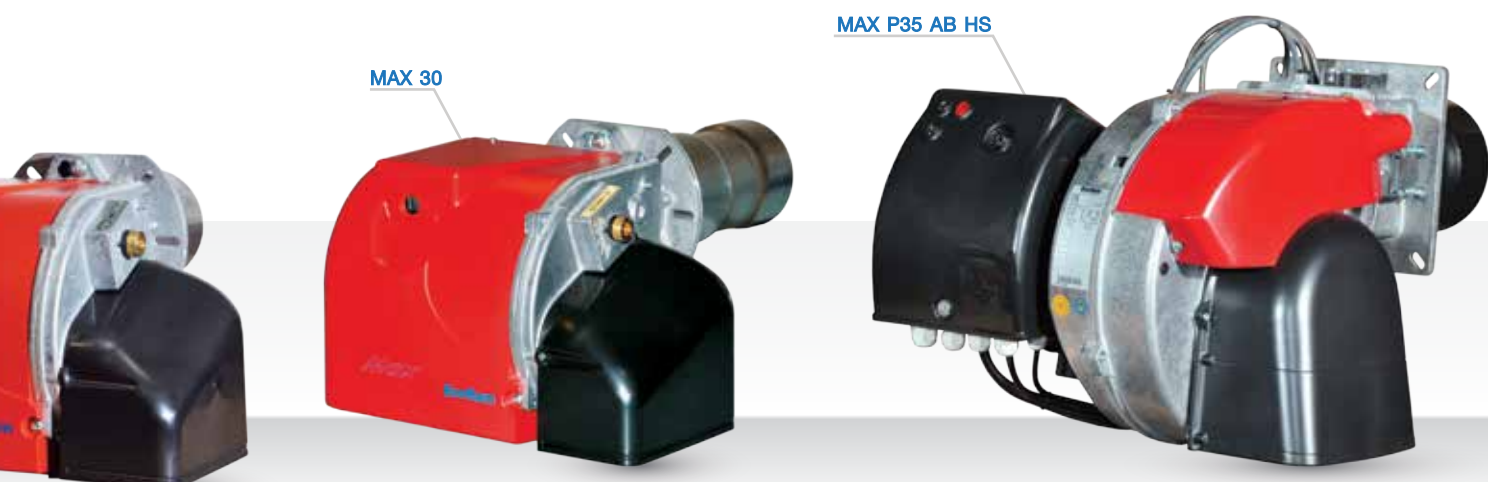

LIGHT OIL RANGE น้ำมันดีเซล MAIOR

RANGE OVERVIEW

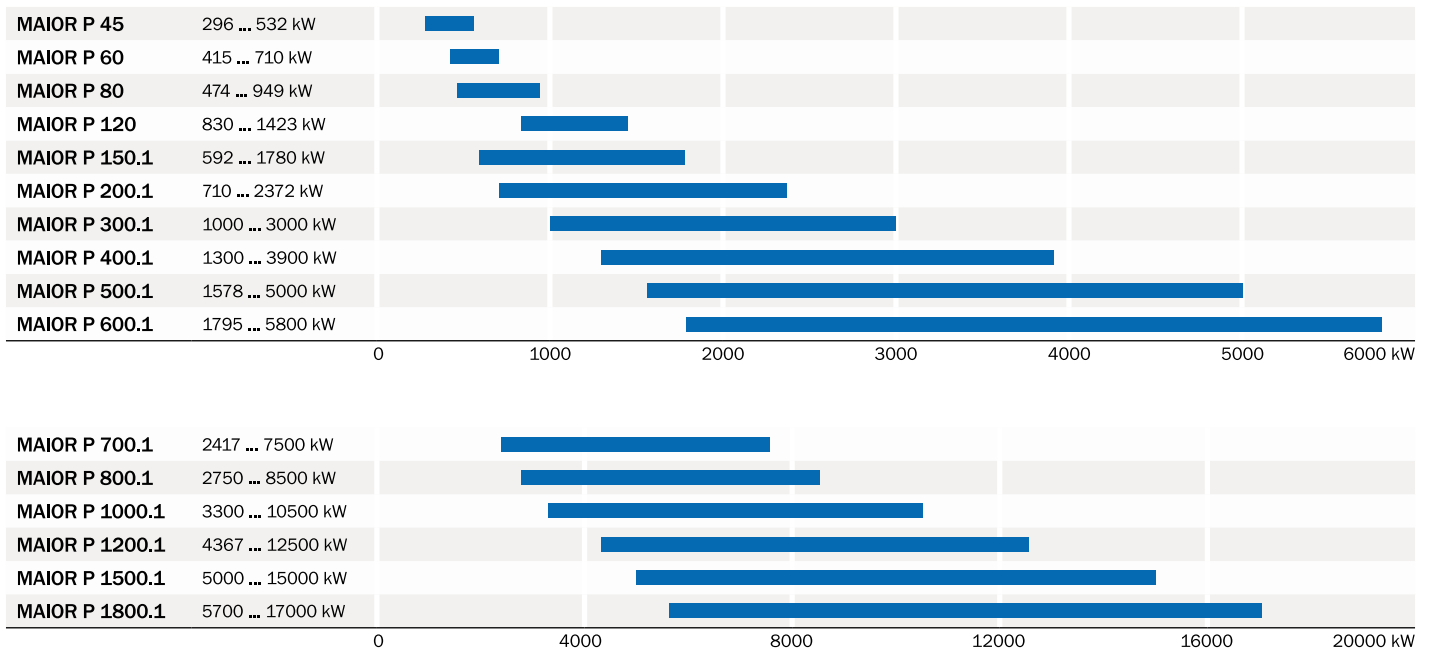

MAIN FEATURES

- Two stage version with hydraulic jack or electric servomotor up to MAIOR P 400.1
- Progressive mechanical version with flow return nozzle
- Modulating version with PID system controller with digital set point display and real time value
- Version with fully electronic Burner Management System available for all models
- Version with sliding bars standard for models from MAIOR 700.1 to MAIOR 1200.1
- Adjustable combustion head for easy regulation and matching with different combustion chambers

MAIOR P60 AB HS



MAIOR P120 AB HS



MAIOR P200.1 AB



CONFIGURATIONS

MAIOR range is available in the following versions:

MAIOR P ... AB	Two stages	MAIOR P 60 AB ... P 400.1 AB	On - Off
MAIOR P ... AB HS	Two stages with hydraulic system	MAIOR P 60 AB HS ... P 400.1 AB HS	Low - High
MAIOR P ... PR	Two stages progressive mechanical	MAIOR P 45 PR ... P 1800.1 PR	Modulate
MAIOR P ... PRE	Two stages progressive electronic	MAIOR P 45 PRE ... P 1800.1 PRE	Electric Modulate

Other available configurations:

- Versions with specific pump for light oil with maximum viscosity 5 °E at 20 °C
- OEM and special versions on request according to feasibility

FUEL

- Light oil (max visc. 1,5 °E at 20 °C) น้ำมันดีเซล
- Bio Diesel (ไบโอดีเซล)


EMISSIONS

Class	NOx mg/kWh
1	250
2	185
3	120

All models are in compliance with EN 267 European Standard

CONFORM TO


- All products are in accordance with the following directives:
- 2006/42/EC Machinery Directive
 - 2004/108/EC EMC Directive
 - 2006/95/EC Low Voltage Directive

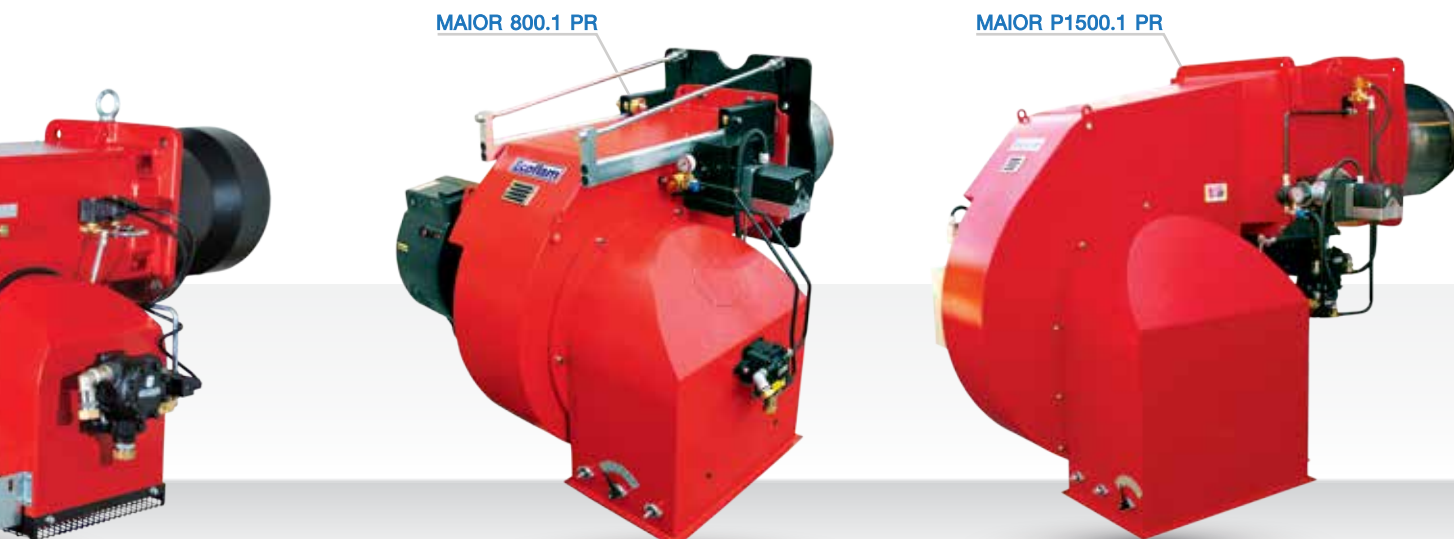

HEAVY OIL RANGE น้ำมันเตา

MAXFLAM/OILFLAM

RANGE OVERVIEW

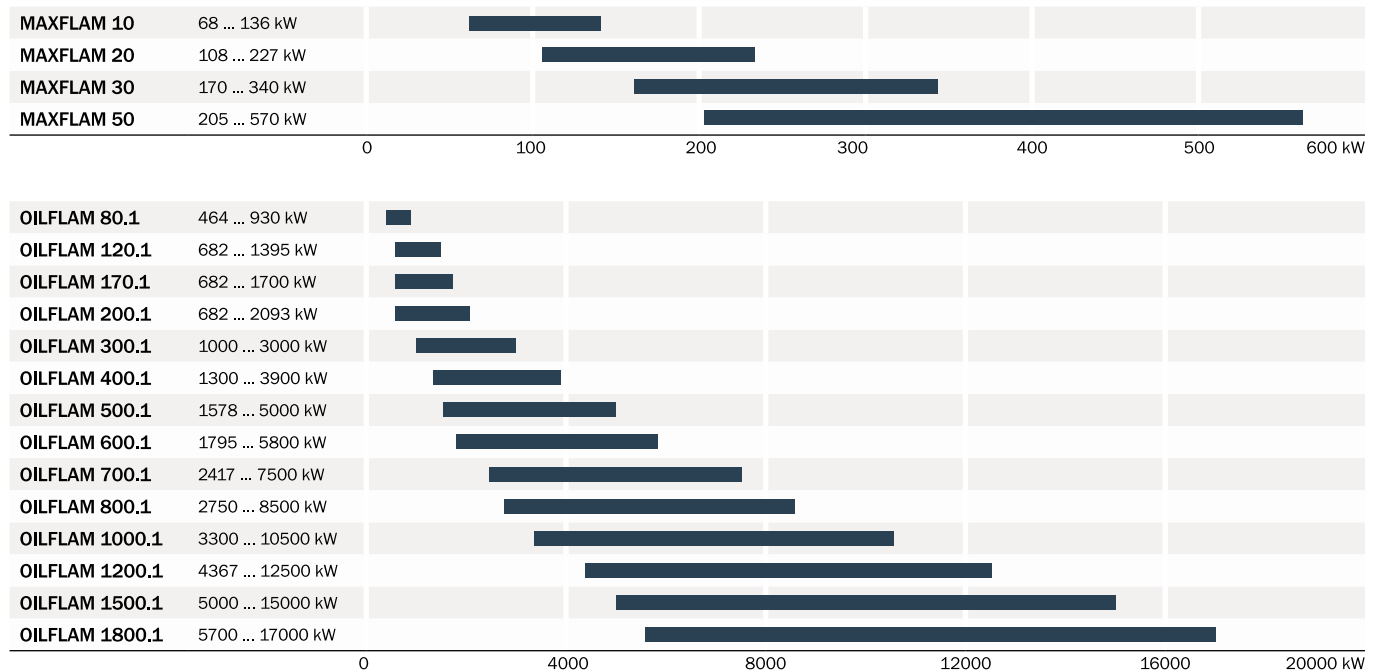

MAIN FEATURES

- All models are suitable to work with heavy oil up to 50° E at 50°C
- Two stage version with electric servomotor available up to model OILFLAM 400.1
- Version with fully electronic Burner Management System available for all models
- Integrated electrical panel complete with pre-heater management system
- Digital thermoregulator integrated on the front panel to grant temperature stability of the fuel (from OILFLAM 300.1)
- Self-cleaning filter installed in the pre-heater in order to keep the nozzle clean from OILFLAM 300.1
- Adjustable combustion head for easy regulation and matching with different combustion chambers
- Heavy oil electric heating system on board
- Ring system for oil preparation can be designed and supply on request

MAXFLAM 20



MAXFLAM 50 AB



OILFLAM 300.1 AB



CONFIGURATIONS

MAXFLAM range is available in the following versions:

MAXFLAM	One stage - 50 °E fuel viscosity at 50 °C	MAXFLAM 10 ... 30	On - Off
MAXFLAM ... AB	Two stages - 50 °E fuel viscosity at 50 °C	MAXFLAM 30 ... 50 AB	Low - High

OILFLAM range is available in the following versions:

OILFLAM ... AB	Two stages - 50 °E fuel viscosity at 50 °C	OILFLAM 80.1 AB ... 400.1 AB	Low - High
OILFLAM ... PR	Two stage progressive mechanical - 50 °E fuel viscosity at 50 °C	OILFLAM 80.1 PR ... 1800.1 PR	Modulate
OILFLAM ... PRE	Two stage progressive electronic - 50 °E fuel viscosity at 50 °C	OILFLAM 80.1 PRE ... 1800.1 PRE	Electric Modulate

Other available configurations:

- Version for high viscosity heavy oil available on request

FUEL

- Heavy oil (max visc. 50 °E at 50 °C) น้ำมันเตา

EMISSIONS

Class	NOx mg/kWh
1	250
2	185
3	120

All models are in compliance with EN 267 European Standard

CONFORM TO

All products are in accordance with the following directives:

- 2006/42/EC Machinery Directive
- 2004/108/EC EMC Directive
- 2006/95/EC Low Voltage Directive

OILFLAM 1000.1 PR




OILFLAM 1800.1 PR



DUAL FUEL (GAS/LIGHT OIL) RANGE 2 เชื้อเพลิง แก๊ส / น้ำมันดีเซล MULTICALOR

RANGE OVERVIEW

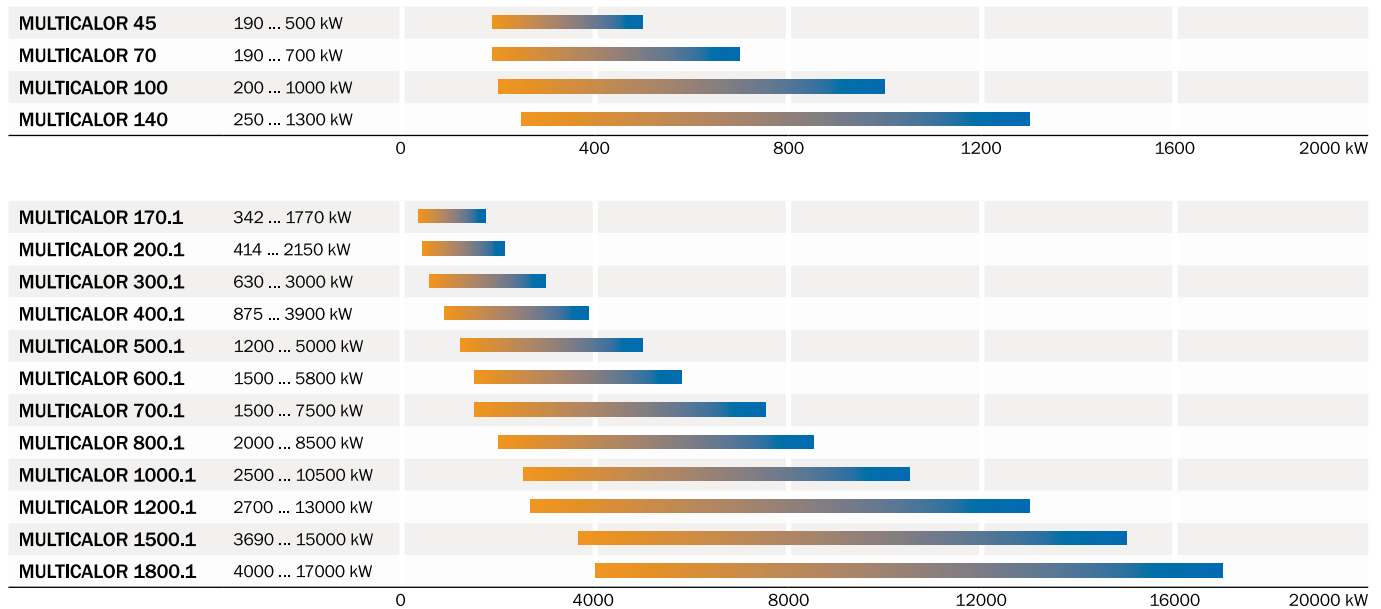


MAIN FEATURES

- Two stage version with electric servomotor and integrated system for the regulation of air and fuel (from MULTICALOR 45 to MULTICALOR 200.1)
- Progressive version with electric servomotor and double adjustable mechanical cam that allows air and fuel fine tuning
- Version with fully electronic Burner Management System available for all models
- Adjustable combustion head for easy regulation and matching with different combustion chambers
- Configured and special version on request for selected type of applications and fuel characteristics



MULTICALOR 300.1 PR/AB

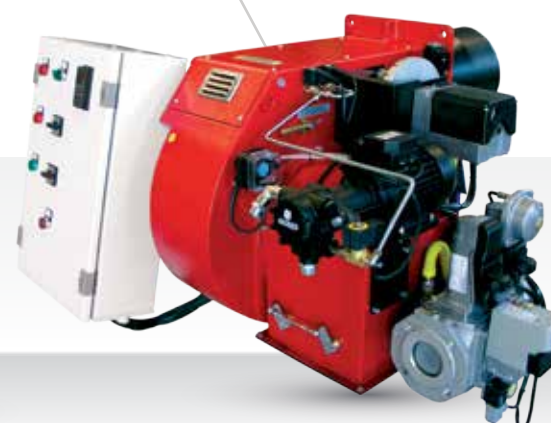

CONFIGURATIONS

MULTICALOR range is available in the following versions:

MULTICALOR	Two stages gas / two stages light oil	MULTICALOR 45 ... 200.1	On - Off
MULTICALOR ... PR/AB	Two stage progressive mechanical in gas / two stages light oil	MULTICALOR 70 PR/AB ... 200.1 PR/AB	Modulate gas / Low - High Light Oil
MULTICALOR ... PR	Two stage progressive mechanical in gas and in light oil	MULTICALOR 70 PR ... 1800.1 PR	Modulate
MULTICALOR ... PRE	Two stages progressive electronic in gas and in light oil	MULTICALOR 70 PRE ... 1800.1 PRE	Electric Modulate

Other available configurations:

- Swirl system for flame geometry customization
- OEM and special versions on request according to feasibility

น้ำมันเตา

FUEL

- Natural gas (NG)
- LPG
- Light oil (max visc. 1,5° E at 20°C) น้ำมันดีเซล
- Bio Gas ไบโอดีเซล
- Bio Diesel ไบโอดีเซล

EMISSIONS

Gas		Oil	
Class	NOx mg/kWh	Class	NOx mg/kWh
1	170	1	250
2	120	2	185
3	80	3	120

All models are in compliance with EN 676 and EN 267 European Standard

CONFORM TO

All products are built in accordance with the following directives:

- 2006/42/EC Machinery Directive
- 2004/108/EC EMC Directive
- 2006/95/EC Low Voltage Directive
- 2009/142/EC Gas Appliances Directive

MULTICALOR 800.1 PR




MULTICALOR 1200.1 PR



DUAL FUEL (GAS/HEAVY OIL) RANGE 2 เชื้อเพลิง แก๊ส / น้ำมันเตา

MULTIFLAM


RANGE OVERVIEW

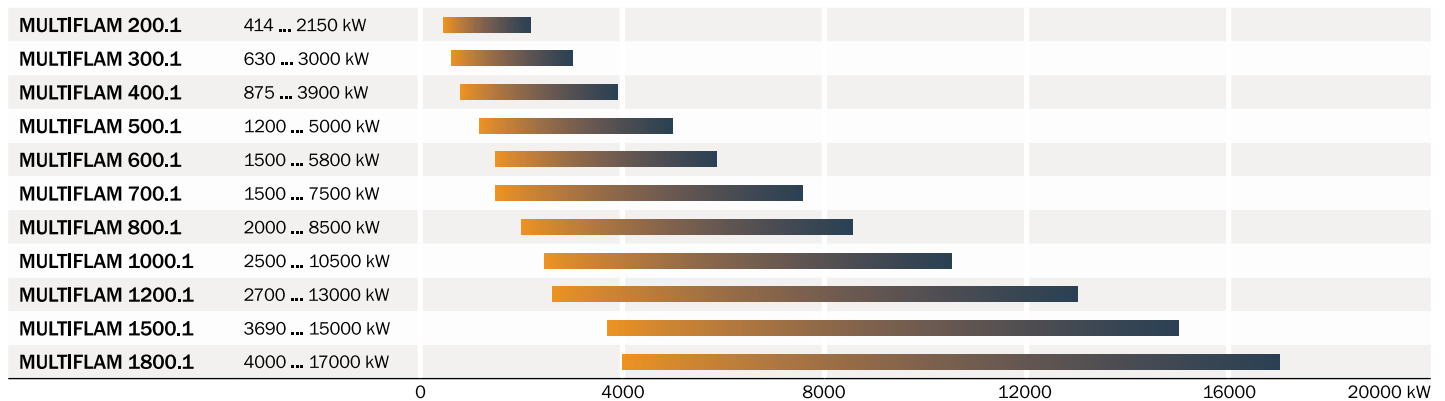


MAIN FEATURES

- Two stage version with electric servomotor and integrated system for the regulation of air and fuel (for MULTIFLAM 200.1)
- Progressive version with electric servomotor and double adjustable mechanical cam that allows air and fuel fine tuning
- Modulating version with PID system controller with digital set point display and real time value
- Version with fully electronic Burner Management System available for all models
- Digital thermoregulator integrated on the front panel to grant temperature stability of the fuel (from MULTIFLAM 300.1)
- Adjustable combustion head for easy regulation and matching with different combustion chambers
- Gas pilot included with separate supply line
- Heavy oil electric heating system on board
- Configured and special version on request for selected type of applications and fuel characteristics

MULTIFLAM 200.1

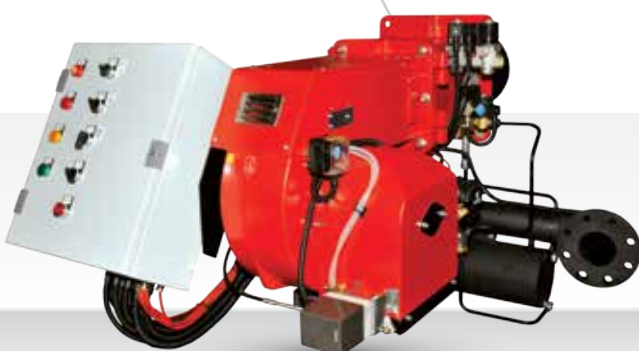

MULTIFLAM 400.1 PR

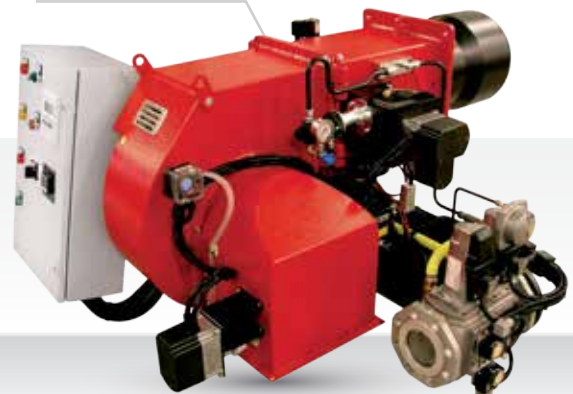

CONFIGURATIONS

MULTIFLAM range is available in the following versions:

MULTIFLAM	Two stages gas / two stages heavy oil	MULTIFLAM 200.1	On - Off
MULTIFLAM ... PR	Two stage progressive mechanical in gas and in heavy oil	MULTICALOR 300.1 PR ... 1800.1 PR	Modulate
MULTIFLAM ... PRE	Two stage progressive electronic in gas and in heavy oil	MULTICALOR 300.1 PRE ... 1800.1 PRE	Electric Modulate

Other available configurations:

- OEM and special versions on request according to feasibility

FUEL:

- Natural gas (NG)
- LPG
- Heavy oil (max visc. 50° E at 50 °C) น้ำมันเตา
- Bio Gas ไบโอฟิล

EMISSIONS

Class	Gas	Class	Oil
	NOx mg/kWh		NOx mg/kWh
1	170	1	250
2	120	2	185
3	80	3	120

All models are in compliance with EN 676 and EN 267 European Standard

CONFORM TO

All products are built in accordance with the following directives:

- 2006/42/EC Machinery Directive
- 2004/108/EC EMC Directive
- 2006/95/EC Low Voltage Directive
- 2009/142/EC Gas Appliances Directive

MULTIFLAM 600.1 PR



MULTIFLAM 1500.1 PR



DUOBLOCK RANGE เบรินเนอร์แบ่งแยกส่วน

TS RANGE

MAIN FEATURES

- Duoblock burners are suitable for all types of installation and can utilize existing ventilators and overcome high resistance in the heat exchanger or combustion chamber or simply fulfil customers request or industrial application requirements
- All models can run with pre-heated combustion air and save a considerable amount of energy that can be recovered from the hot flue gases by using a heat exchanger in the flue gas system (maximum air temperature 200°C)
- Construction layout and main features of the duoblock range match the monoblock burners and allow to use the same components and set up tools; burners can be assembled with air duct connection in different layouts
- Burners can be supplied in mechanical progressive modulating operation with PID controller or with electronic compound regulation that support also inverter system for speed control and O₂ Trim control
- All TS models feature easy maintenance, with quick access to the combustion head from the housing top cover


CONFIGURATIONS

TS range is available in the following versions:

"Range" TS ... AB	Two stages (Models up to 2 MW)
"Range" TS ... PR	Two stage progressive mechanical
"Range" TS ... PRE	Two stage progressive electronic


RANGE OVERVIEW

GAS เกล็ด

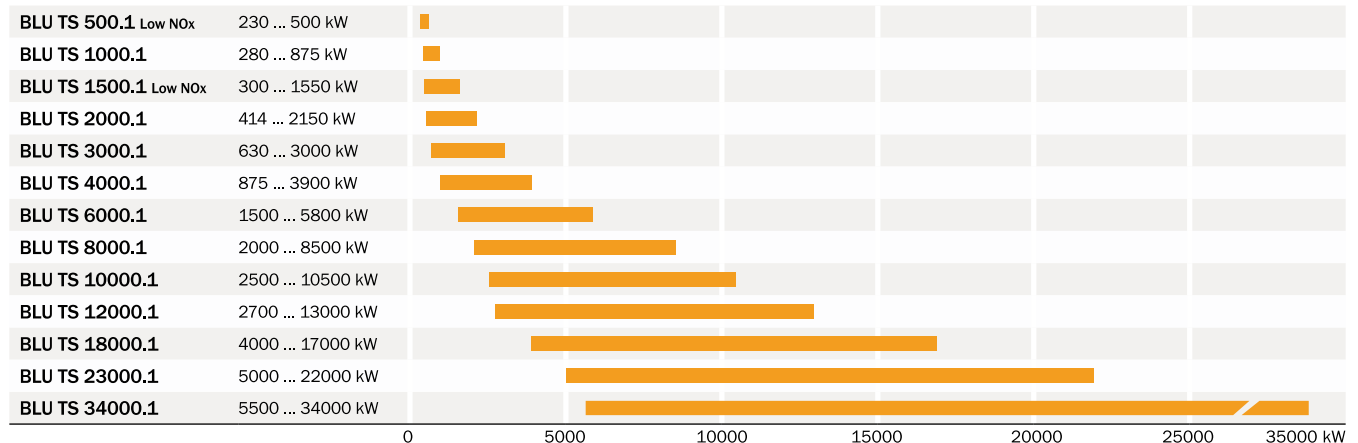


LIGHT OIL น้ำมันดีเซล

Oil pump on board

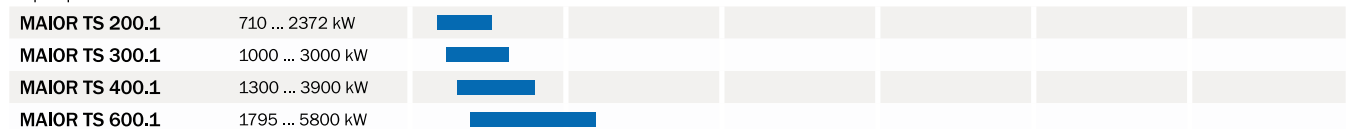

Separated oil pumping unit

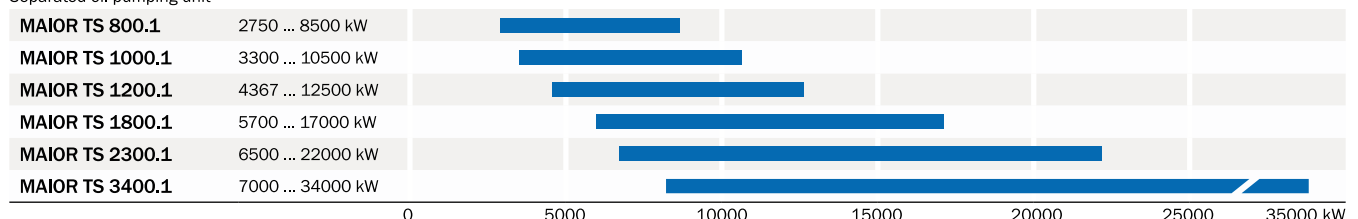

HEAVY OIL น้ำมันเตา

Oil pump on board

OILFLAM TS 200.1	710 ... 2372 kW	
OILFLAM TS 300.1	1000 ... 3000 kW	
OILFLAM TS 400.1	1300 ... 3900 kW	
OILFLAM TS 600.1	1795 ... 5800 kW	

Separated oil pumping unit

OILFLAM TS 800.1	2750 ... 8500 kW	
OILFLAM TS 1000.1	3300 ... 10500 kW	
OILFLAM TS 1200.1	4367 ... 12500 kW	
OILFLAM TS 1800.1	5700 ... 17000 kW	
OILFLAM TS 2300.1	6500 ... 22000 kW	
OILFLAM TS 3400.1	7000 ... 34000 kW	

0 5000 10000 15000 20000 25000 35000 kW

DUAL FUEL (GAS/LIGHT OIL) แก๊ส / น้ำมันดีเซล

Oil pump on board

MULTICALOR TS 100	300 ... 1000 kW	
MULTICALOR TS 140	400 ... 1300 kW	
MULTICALOR TS 200.1	414 ... 2150 kW	
MULTICALOR TS 300.1	630 ... 3000 kW	
MULTICALOR TS 400.1	875 ... 3900 kW	
MULTICALOR TS 600.1	1500 ... 5800 kW	

Separated oil pumping unit

MULTICALOR TS 800.1	2000 ... 8500 kW	
MULTICALOR TS 1000.1	2500 ... 10500 kW	
MULTICALOR TS 1200.1	2700 ... 13000 kW	
MULTICALOR TS 1800.1	4000 ... 17000 kW	
MULTICALOR TS 2300.1	5000 ... 22000 kW	
MULTICALOR TS 3400.1	5500 ... 34000 kW	

0 5000 10000 15000 20000 25000 35000 kW

DUAL FUEL (GAS/HEAVY OIL) แก๊ส / น้ำมันเตา

Oil pump on board

MULTIFLAM TS 300.1	630 ... 3000 kW	
MULTIFLAM TS 400.1	875 ... 3900 kW	
MULTIFLAM TS 600.1	1500 ... 5800 kW	

Separated oil pumping unit

MULTIFLAM TS 800.1	2000 ... 8500 kW	
MULTIFLAM TS 1000.1	2500 ... 10500 kW	
MULTIFLAM TS 1200.1	2700 ... 13000 kW	
MULTIFLAM TS 1800.1	4000 ... 17000 kW	
MULTIFLAM TS 2300.1	5000 ... 22000 kW	
MULTIFLAM TS 3400.1	5500 ... 34000 kW	

0 5000 10000 15000 20000 25000 35000 kW

MULTICALOR TS 400.1 PR HT



BLU TS 6000.1 PR HT



SPECIAL VERSIONS เครื่องพ่นไฟออกแบบพิเศษ

Ecoflam is renowned for its ability to conceive and build flexible products and to propose customized solutions for any type of applications.

Successful and satisfied customers, both from OEM or distribution fields, demonstrate throughout the years that Ecoflam is able to meet their requests offering a wide range of special products capable to satisfy even the most difficult ones.


High Temperature versions



Small products for industrial applications



Two/four heads burners

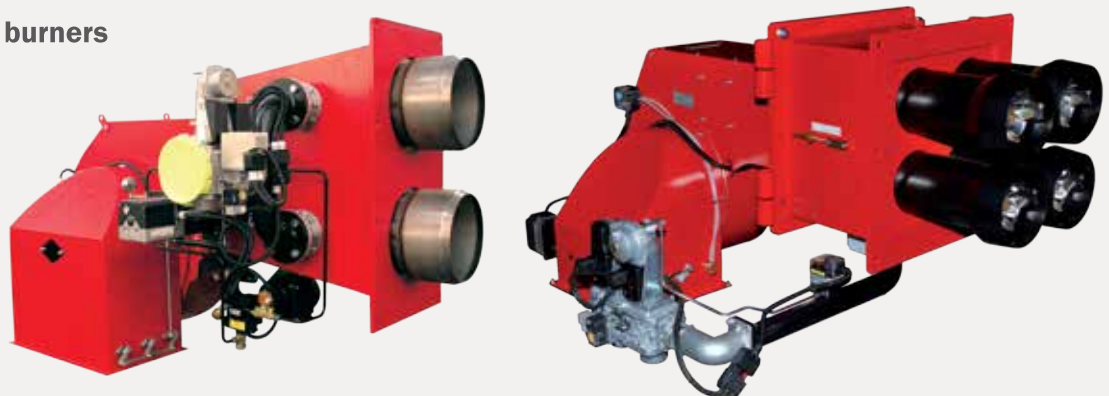

Gas Valve



Control Box



Air Pressure Switch



Nozzle



Pressure Gauge



Transformer



Valves & Coils



Governor



Pressure Regulator



Motor

CUSTOMER SERVICE

Maintenance and inspection

The burner is a crucial part of the installation. To keep the installation in good conditions, it is important to maintain the burner periodically. It is also very important to inspect all the safeties to ensure that the system operates safely. The professional services of Ecoflam can perfectly perform this service for any type of installation.



การตรวจสอบและการบำรุงรักษา

นอกจากบริการการติดตั้งแล้วเรายังมีบริการตรวจสอบและซ่อมบำรุงตามระยะเวลาที่กำหนด เพื่อให้เครื่องฟืนไฟมีอายุการใช้งานที่ยาวนานและได้ประสิทธิภาพมากที่สุด

Training

In order to respond to the need of customers Ecoflam created the Burner training (at no charge). Covers the know-how of the internal technicians to you. We offer training of your location for maintenance also.



การอบรมการใช้งานและบำรุงรักษา

กลุ่มบริษัท ทีเอ็น ได้จัดฝึกอบรม เรื่องการใช้งานและการบำรุงรักษาเครื่องฟืนไฟ โดยวิทยากรมืออาชีพ นอกจากนี้ เรายังจัดกิจกรรมอบรมนอกสถานที่ให้กับบริษัทลูกค้าที่ต้องการเพิ่มความรู้อีกเกี่ยวกับเครื่องฟืนไฟให้กับพนักงาน

Worldwide Service Network

Ecoflam uses a worldwide network of partners consisting of well-trained local engineers to carry out its service operations. These technicians are able to perform both commissioning and local service and they do it in a very professional way.



บริการหลังการขาย

เรามีทีมบริการหลังการขายคอยบริการ ตลอด 24 ชม. นอกจากนี้เรายังมี ศูนย์บริการหลังการขายกระจายอยู่ทั่วประเทศ

Reliable supply of spare parts

Spare parts have always had a great importance inside the Ecoflam world. Considering the high amount of parts involved in every single product, some of these parts might naturally need to be substituted. Ecoflam can count on a international network offering original spare parts in order to guarantee the highest quality, reliability and safe continued operation of the appliance.



อะไหล่และบริการ

เครื่องฟืนไฟ อีโคเฟลม เราใช้วัสดุที่มีคุณภาพ และได้รับการรับรองมาตรฐานสากล

PROJECT REFERENCE



CREMATORY

APPLICATION : เตาเผาศพ ไร้มลพิษ
 PRODUCT DETAIL : Gas Burner MAX P45 AB : 2 Set.
 Heat output : 202 kW – 546 kW



BOILER 3,000kg/hr.

APPLICATION : บอยเลอร์
 PRODUCT DETAIL : Gas Burner BLU 2000.1P AB
 Heat output : 414 kW – 2150 kW



INCINERATOR

APPLICATION : เตาเผาขยะมูลฝอย
 PRODUCT DETAIL : Gas Burner Max Gas 105P
 Heat output : 49 kW – 108 kW




PAINTING OVEN

APPLICATION : ระบบอบแห้งหลังจากพ่นสี
 PRODUCT DETAIL : Gas Burner Max Gas 350P AB
 Heat output : 100 kW – 350 kW



PLANT DRYER

APPLICATION : เตาอบสินค้าเกษตร
 PRODUCT DETAIL : Burner BLU 170 PAB TC 2set
 Heat output : 500 kW

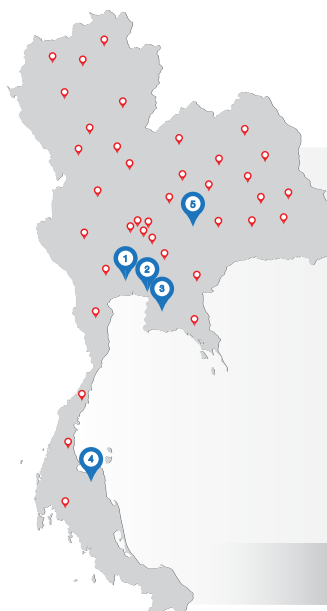

BRANCH OFFICE

- 1) Omnoi - Petchakasem 91 Rd.
 - 2) Bangna
 - 3) Rayong
 - 4) Surathani
 - 5) Khonkaen
- Distributor

INFO@TNGROUP.CO.TH
 WWW.TNMETALWORKS.COM



TN Metalworks Co., Ltd.



[tngroupfan](#)



www.tngroup.co.th

**18/5 Moo 13 Petchkasem 91 Rd.
Sol Watmalhongpa-ong Omnoi
Krathumban Samutsakorn
74130 Thailand**



Petchkasem 91	:	02-115-6000	02-115-6555
Bangna	:	02-750-8888	02-750-8888
Supergut	:	02-661-4555	02-661-5555
Rayong	:	033-109-111	033-109-222
Suratthani	:	077-255-887-6	077-255-608



info@tnmetalworks.com



www.tngroup.co.th